
Solid Carbide Internal Thread Relief Mills

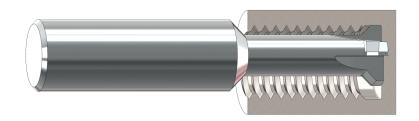

Number	Dia.	Flat	Rad.	Neck	Neck	Shank	OAL	No. of	Price	
				Dia.	Length	Dia.		Flutes	No-Coat	AITiN
TR3-48	.072	.021	.005	.032	.180	3/16	2	2	\$65.	\$69.
TR4-40	.080	.025	.005	.032	.210	3/16	2	2	\$65.	\$69.
TR6-32	.099	.031	.010	.047	.290	3/16	2	2	\$65.	\$69.
TR8-32	.128	.031	.010	.076	.330	3/16	2	3	\$65.	\$69 .
TR10-24	.139	.042	.012	.073	.410	3/16	2	3	\$65.	\$69 .
TR1/4-20	.188	.050	.012	.108	.435	1/4	2	4	\$70.	\$74.
TR5/16-18	.247	.056	.012	.159	.538	3/8	2-1/2	4	\$80.	\$87.
TR3/8-16	.300	.063	.012	.202	.641	3/8	2-1/2	4	\$90.	\$97.
TR1/2-13	.420	.077	.012	.284	.848	1/2	2-1/2	6	\$105.	\$114.


^{*}Necks ground longer on request with minimal charges based upon quantity

Undercut diameter:

Pitches finer than 20 TPI = thread basic major dia + .0075 Pitches of 20 TPI and courser = thread basic major dia + .0150

Special Thread Relief Mills Made in 4-6 Working Days

Machining what part material, please? _____

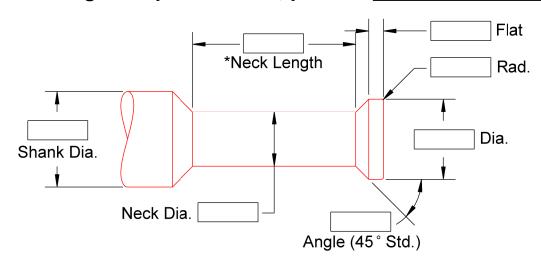



A. B. TOOLS, INC. 1051 Aviation Blvd. Lincoln, CA 95648-9312 Phone 916 408-2442 FAX 916 993-3949

www.abtoolsinc.com E-Mail: mail@abtoolsinc.com

PAGE 35